


SLAB SOFFIT

WATERPROOFING TO SLAB SOFFIT SPECIFICATION

- 1. General:
- 1.1. The ACTFLEX 988 CWP waterproofing system shall be applied to the slab soffit before the installation of aluminium windows and sliding doors.
- 1.2. The slab surface must be prepared, cleaned, and free from any loose debris, oil, or contaminants before the application of the waterproofing membrane.
- 2. Application Procedure:
- 3.1. The ACTFLEX 988 CWP waterproofing system shall be applied in two coats, with each coat having a thickness of 400 microns (0.4mm).
- 3.2. The first coat shall be applied directly to the prepared and cleaned slab soffit surface.
- 3.3. The first coat shall be evenly spread using a suitable brush, roller, or spray application method, ensuring complete coverage over the designated area.
- 3.4. After the application of the first coat, allow a drying time of 4-6 hours @ 25°C and 50% R.H. ensuring it is fully dry before proceeding.
- 3.5. The second coat shall be applied on top of the first coat, following the same application procedure and thickness.
- 3.6. After the application of the second coat, allow a drying time of 24 hours @ 25°C and 50% R.H, ensuring it is fully cured and dry before further construction activities.

Always consult with a Actech Protective Coatings Representative for regulations specific to your wet areas, as they may have additional requirements for waterproofing projects.



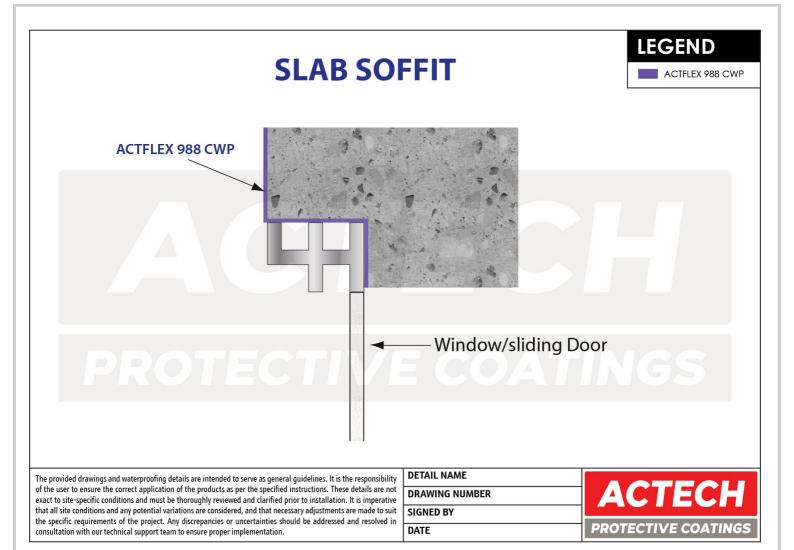

• PLEASE NOTE: All details and specifications must refer to data sheet.

CONDITIONS OF USE, PRODUCT DISCLAIMER AND STATEMENT OF RESPONSIBILITY

The information supplied is given in good faith and to the best of our knowledge is true and accurate at the time of printing. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use of application and no warranty as to accuracy, reliability or completeness either expressed or implied is given other than those required by Commonwealth or State Legislation. We reserve the right to update information without prior notice to you to reflect our ongoing research and development program. The customer or the contractor is responsible for checking the suitability of products for their intended use. It is the customers' responsibility to ensure that our products are used and handled correctly and in accordance with any applicable Australian Standards. Our instructions and recommendations are only for intended users only. Any advice, recommendation, information, assistance or service provided by Actech Protective Coatings in relation to its products or their use is given in good faith, however is provided without responsibility or liability. To the full extent permitted by law, Actech Protective Coatings Products liability is limited to its discretion, to replace or to refund the purchase price of the quantity of the products supplied. Actech Protective Coatings does not exclude rights and remedies that cannot be excluded by legislation, for example under the Consumer Guarantees Act 1993. Under no circumstances will the company be liable for loss, consequential or otherwise, arising from the use of the product.

